


## 1450 1550 nm extremely low rippled, very wide spectrum SLD

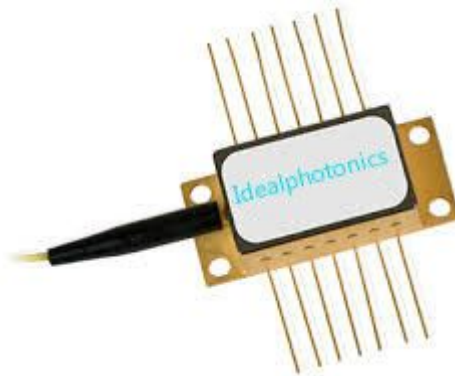

### **Description**

These low-power SLDs are developed specifically for customers looking for extremely broadband and extremely low rippled SLD for the most common communication bands. Devices are available at 1550 nm and 1450 nm center wavelengths

### **Feature**

Low cost low power modules

Flat spectrum with negligible residual Fabry-Perot modulation depth

### **Application**

testing WDM/DWDM components

fiber optic metrology

fiber optic gyros

fiber optic sensors

optical coherence tomography

optical measurements

### **Packages:**

DIL, BUT; others on request

### **Additional & customized:**

PM fiber pigtails (slow axis alignment; 45 degree orientation upon request)

FC/APC terminated pigtails



### **Specification**



Parameter	Series	Min	Typ.	Max
Output power ex SM fiber, emitter @ +20 °C, SLD-76-LP fiber pigtailed, mW	All	0.15	0.2	-
Peak wavelength*, nm	LP-1450	1430	1450	1470
	LP-1550	1540	1560	1580
Spectrum width, FWHM, nm	LP-1450	60	70	-
	LP-1550	80	100	-
Spectral density, ±50 nm from peak wavelength, dBm/0.1 nm	All	-50	-	-
Maximum spectral ripple, peak-to-peak, %	All	-	1 - 2	5 (0.2 dB)
Secondary coherence subpeaks (Reflectivity), dB	All	-	< -40	-
Forward current, mA	All	-	-	200
Forward voltage, V	All	-	1.6	2.2

\* Each specific peak wavelength is subject to availability

Paramet	Category	Min	Typ.	Max
Forward current	All	-	-	200
Forward voltage, V	All	-	1.6	2.2
Operating temperature (case), °C	All	-55	-	+70
Cooler current, A	All	-	-	1.2
Cooler voltage, V	All	-	-	3.5

## PERFORMANCE EXAMPLES

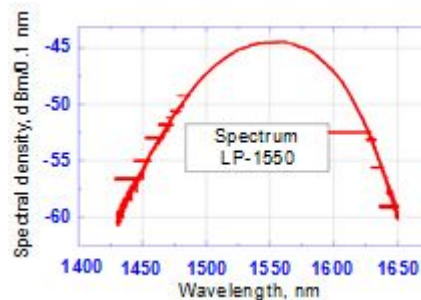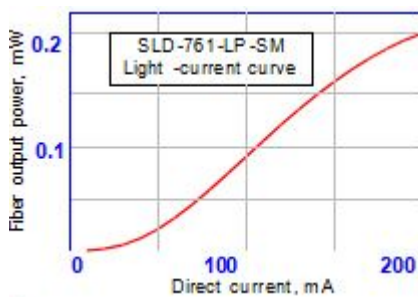

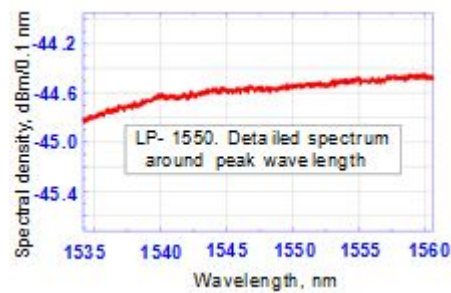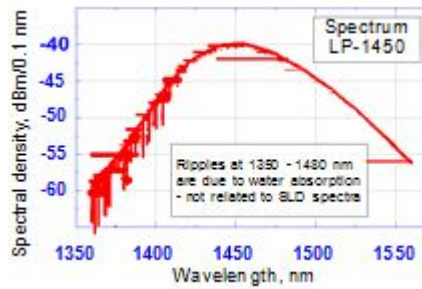

## Ordering Information :

SLD-761-LP-(c)-(d)-(f),

where:(c) – package type,(d) – SM (isotropic) or PM (polarization maintain) fiber,

## Attention:

peak wavelength is guaranteed within  $\pm 10$  nm upon specified. Each specific wavelength may be subject for availability. Devices rated to maximum 0.1 dB peak-to-peak ripple at full power are available upon request.