


1550nm 60nm Single Mode Tunable Filter



Product Description

High-speed tunable bandpass filter. As a two-port optical module, the input port receives broadband multi-wavelength light and only a small portion of the incident signal within the passband is allowed to pass through the filter and directed to the output port. The center wavelength of the selected band can be tuned to anywhere within the operating wavelength range. In our design flexibility, transmission bandwidth, wavelength tuning range can be customized. The voltage-controlled filter requires no moving parts, has fast tuning speed, and is compact and small in size. Our filters are used as suppression filters in optical systems to improve laser signal-to-noise ratio in wavelength scanning engines of optical spectrum analyzers (OSAs) and in system diagnostic communication systems.









Part Number

TOF-1550-500-60-SA

Product features


High-speed wavelength tuning Wide operating wavelength range Flat-top/Gaussian filter shapes No moving parts Over 1 billion cycles

Application area

Optical spectrum analyzer engine、 ASE noise suppression、 Optical channel diagnostics、 Test and measurement instruments、 Channel selection for wavelength lockers

Parameters

Dimensional Drawing

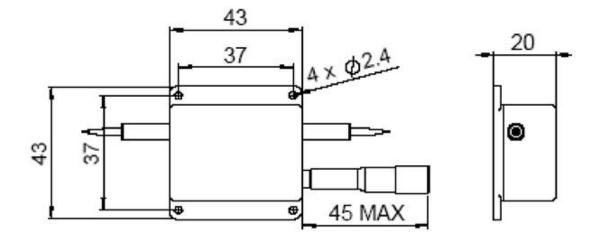










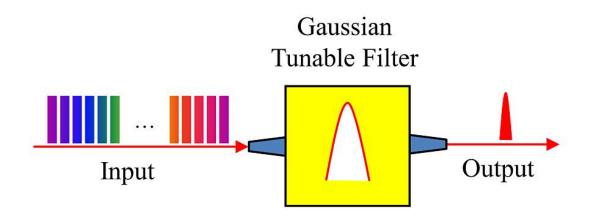

Technical parameters:

| Parameters | Min | Typical | Max | Unit |
|----------------------------------|-----|------------------------|------|------|
| Center wavelength | - | 1060, 1310, 1550, 2000 | - | nm |
| Tuning range[1] | - | 60 | 80 | nm |
| Tuning resolution | - | 0.1 | - | nm |
| Insertion loss[2] | 2 | 3 | 4 | dB |
| Bandwidth @-3dB | - | 1 | 1.2 | nm |
| Bandwidth @-20dB | - | 10 | - | nm |
| Sideband suppression | - | 30 | - | dB |
| PDL (SM fiber only) | - | 0.15 | 0.35 | dB |
| PMD (SM fiber only) | - | - | 0.5 | ps |
| Extinction ratio (PM fiber only) | 18 | 23 | - | dB |
| Return loss | 40 | - | - | dB |
| Operating power (CW)[3] | - | 0.5 | 15** | W |
| Operating temperature | 0 | 20 | 60 | °C |
| Storage temperature | -10 | - | 70 | °C |
| Dimensions | - | 43 L x 43 W x 20 H | - | mm |

- [1]. Longer wavelength and larger tuning range.
- [2]. Small core fiber has greater loss. Loss data tested with broadband light source without connector.
- [3]. Supports customized service of high operating power up to 15W.












Test light source spectrum

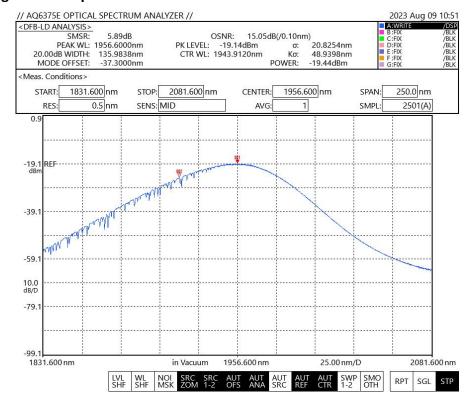

Measured spectrum

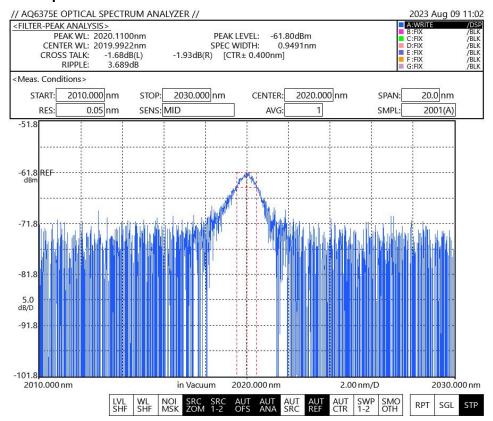











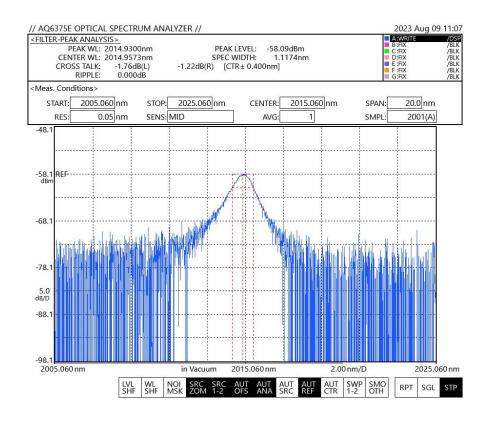

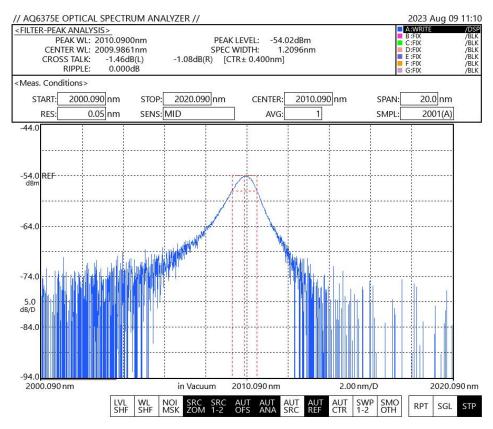











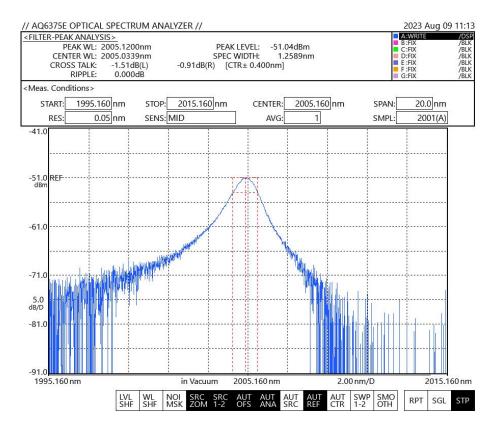


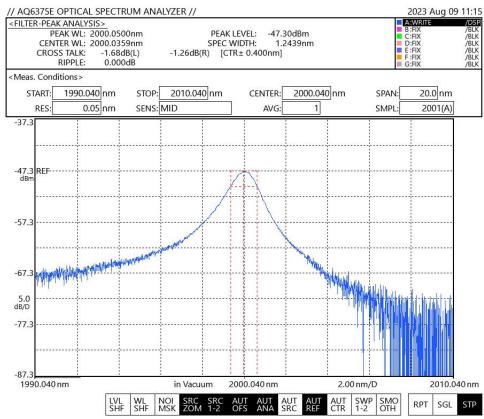








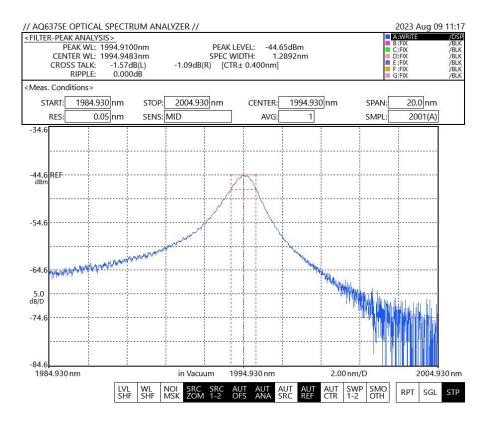

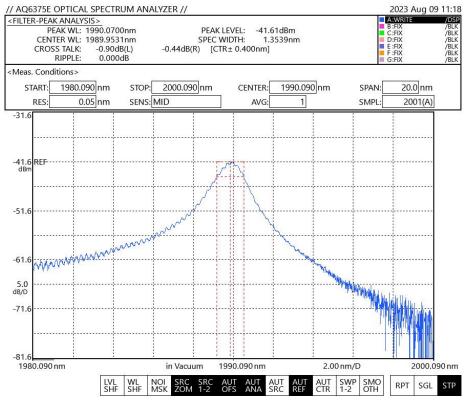











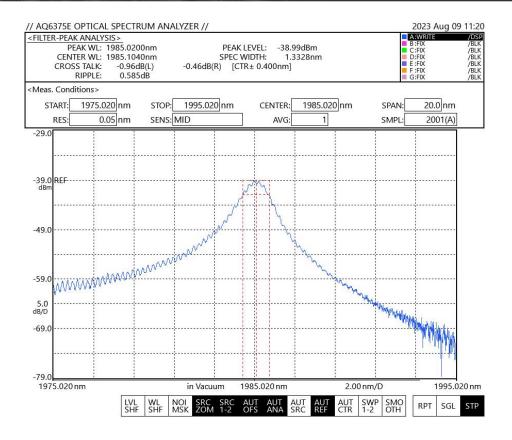

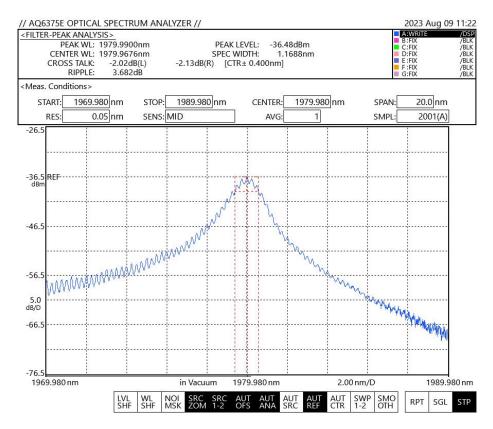











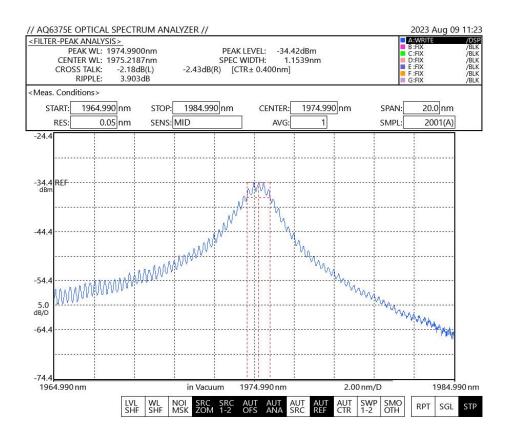

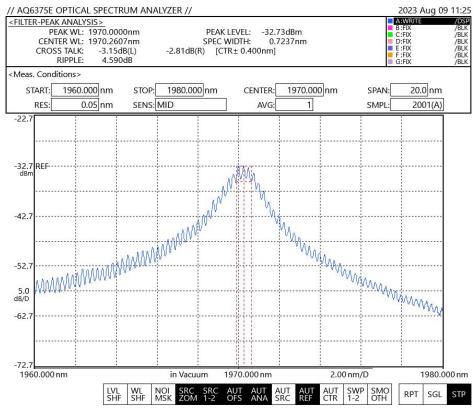











The relation between entral wavelength and rotary knob position

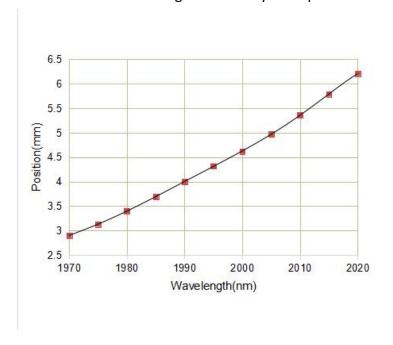

Test light source:

PN: PL-SLD-1550-A-A81-SA

SN: S17062686

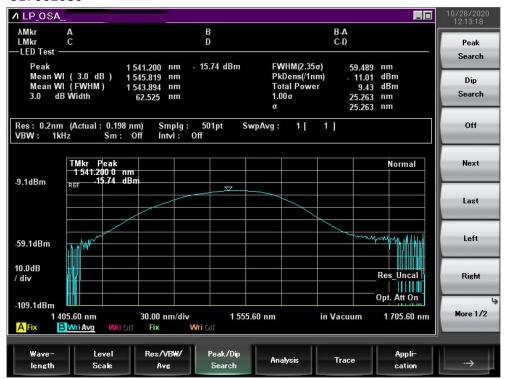

Test light source spectrum














1. Measured spectrum

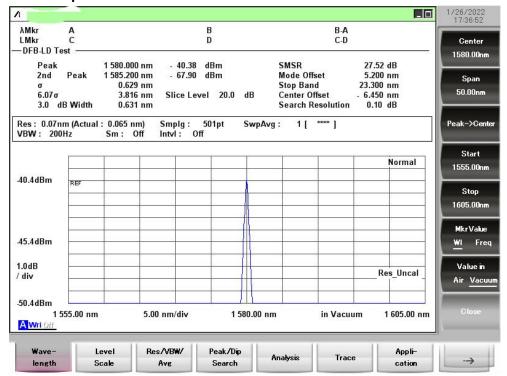

1580nm

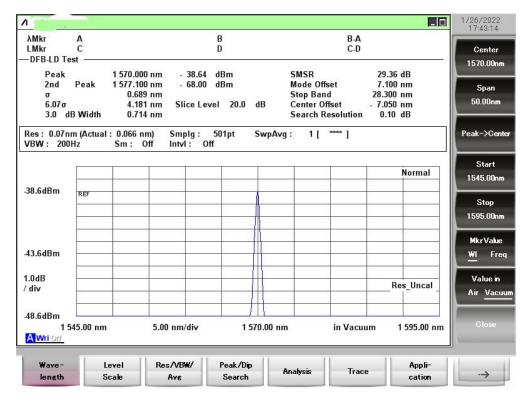

1570nm












1560nm

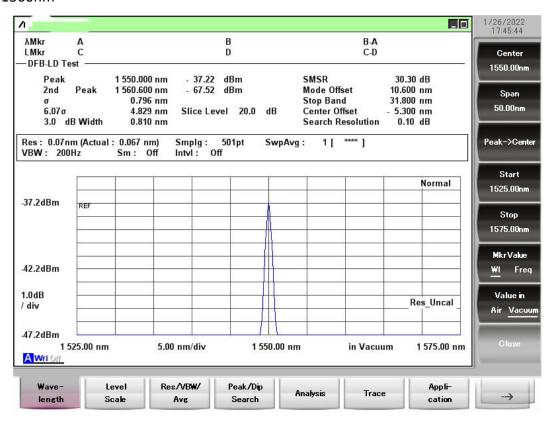

1550nm












1540nm

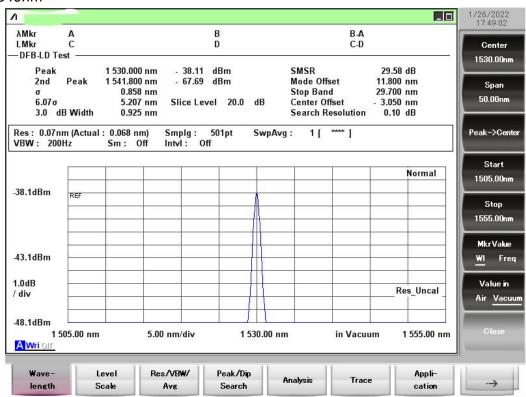


1530nm










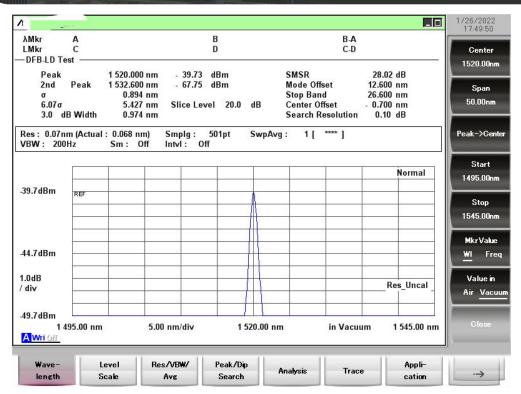


1520nm

2. Relationship between wavelength and knob position

| Wavelength(nm) | Knob Location |
|----------------|---------------|
| 1520 | 4.48 |
| 1530 | 5.07 |
| 1540 | 5.68 |
| 1550 | 6.4 |
| 1560 | 7.2 |
| 1570 | 8.2 |
| 1580 | 9.6 |





Order Info:









TOF- □□□□-☆-A8▽- XX

□□□: Wavelength

1060: 1060nm 1310:1310nm 1550: 1550nm

1620: 1620nm 1850:1850nm 1950:1950nm 2000:2000nm 2100:2100nm

☆ : Handling Power

500: 500mW 5000: 5W

 ∇ : Tuning Range 60: \pm 30nm 100: \pm 50nm

XX: Fiber and Connector Type

SA=HI1060(The single-mode optical fiber of the corresponding wavelength band is

1060nm as an example)+ FC/APC

SP=HI1060+ FC/PC

PA=PM980 Fiber+ FC/APC PP=PM980 Fiber+ FC/APC

